

# SHARKSKIN™

## The Ultimate Roof Underlayment

# COMP

### SHARKSKIN COMP 10 SQ. ROLL

### Instructions and Information

SHARKSKIN COMP™

**Use:** Under composition asphalt shingles and metal roof systems.


**Roll size:** 48"x 250' approx. Roll weight: 38 lbs. approx.

**Coverage:** approx. 960 sq. ft. per roll or less depending upon overlap and roof design.




**Installation:** SHARKSKIN COMP™ roofing underlayment should generally be installed above ventilated attic spaces in most cases. SHARKSKIN COMP™ is considered a vapor barrier, check with local building codes. **Preparation:** The deck surface must be dry and free of dust, dirt, loose nails, debris and other protrusions. **Damaged sheathing must be replaced.** SHARKSKIN COMP™ is laid horizontally parallel to the eave of the roof with the printed side up. Overlaps run with the flow of water in a shingling manner, a minimum 3-inch horizontal laps and a minimum 6-inch vertical laps. Use straight blade utility knife or scissors to cut.

**Fastening:** SHARKSKIN COMP™ is attached to the roof deck with No.12 gauge corrosion-resistant steel or stainless steel ring shank fasteners, having 1-inch diameter corrosion resistant metal round cap, tin tag, or plastic round top caps or plastic caps fastened with corrosion resistant staples. See Diagram 1.

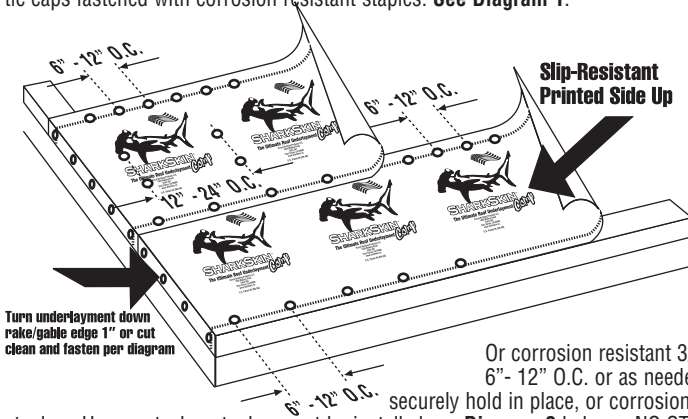

**BE CAREFUL TO OBSERVE SAFE ROOFING CODES & PRACTICES (OSHA). USE CAUTION WHEN WALKING OR STANDING ON SHARKSKIN COMP™. COEFFICIENT OF FRICTION MAY CHANGE WITH WET, DUSTY OR ICY CONDITIONS. FAILURE TO USE PROPER SAFETY GEAR AND FOOTWEAR CAN RESULT IN SERIOUS INJURY.**

staples. Hammertacker staples must be installed **per Diagram 2** below. NO STAPLES in the field of the roof. ONLY STAPLE AT HORIZONTAL AND VERTICAL LAPS. EXPOSED STAPLES MUST PENETRATE THROUGH TWO LAYERS OF SHARKSKIN COMP™. IMPROPER INSTALLATION WILL VOID ANY WARRANTY CLAIM. See Hammertacker Staple Installation\* **Diagram 2** below.

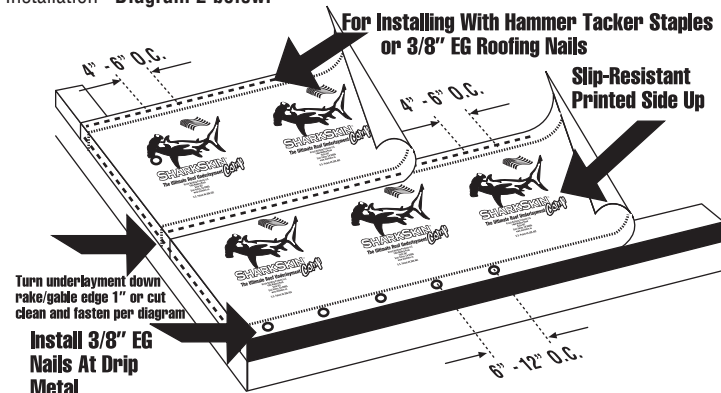

The underlayment shall be fastened as necessary to hold in place to allow for safe walk ability for the installer. \*HAMMERTACKER STAPLE INSTALLATION. COPYRIGHT ©2009 by Kirsch Research and Development LLC.



Florida Building Code (FBC) #FL1655



ESR-1708  
ICC-ES AC188  
ICC-ES AC48  
EXCEEDS ASTM D226



Miami/Dade approval pending.

U.S. Patent #6,308,482

**Kirsch Building Products LLC**  
1464 Madera Road, #N Suite 387  
Simi Valley, CA 93065  
www.sharkskin.us  
1-877-742-7507

